RSQ LED LIGHT

SKYING

- RSQ 50W

- DATA SHEET

Product code	INDUSTRIAL LAMP	
Wattlage(w)	50W	
Current(ma)	230	
Power Factor	>0.9	
Color description	WW/CW	
Color temperature	3000K	6500K
Luminous flux(lm)	5000	5000
Luminous efficiency(lm/w)	100	100
Luminous efficiency(lm/w)	>80	
Dimmable	No	
CBCP(cd)	–	
CRI(Ra)	>80	
Beam angle(°)	90°	
Warm up time	<0.3s	
Starting time	<0.3s	
Operation temperature	−20° ～ 40°	
Average lifetime(hrs)	>40000	
Lumen mainterance factor	L80	
On/Off cycles	>20000	
IP class	IP65	
Size(mm × mm)	180x180x125	
Certification	CE,ROHS	

RSQ 100W

Product code	RSQ LED LAMPS	
Wattlage(w)	100W	
Current(ma)	230	
Power Factor	>0.9	
Color description	WW/CW	
Color temperature	3000K	6500K
Luminous flux(lm)	10000	10400
Luminous efficiency(lm/w)	100	104
Luminous efficiency(lm/w)	>80	
Dimmable	No	
CBCP(cd)	–	
CRI(Ra)	>80	
Beam angle(°)	90°	
Warm up time	<0.3s	
Starting time	<0.3s	
Operation temperature	−20° ～ 55°	
Average lifetime(hrs)	>40000	
Lumen mainterance factor	L80	
On/Off cycles	>15000	
IP class	IP65	
Size(mm × mm)	80 × 125	
SFBK	SMART FIX BRACKET KIT	
Certification	CE,ROHS,SASO	

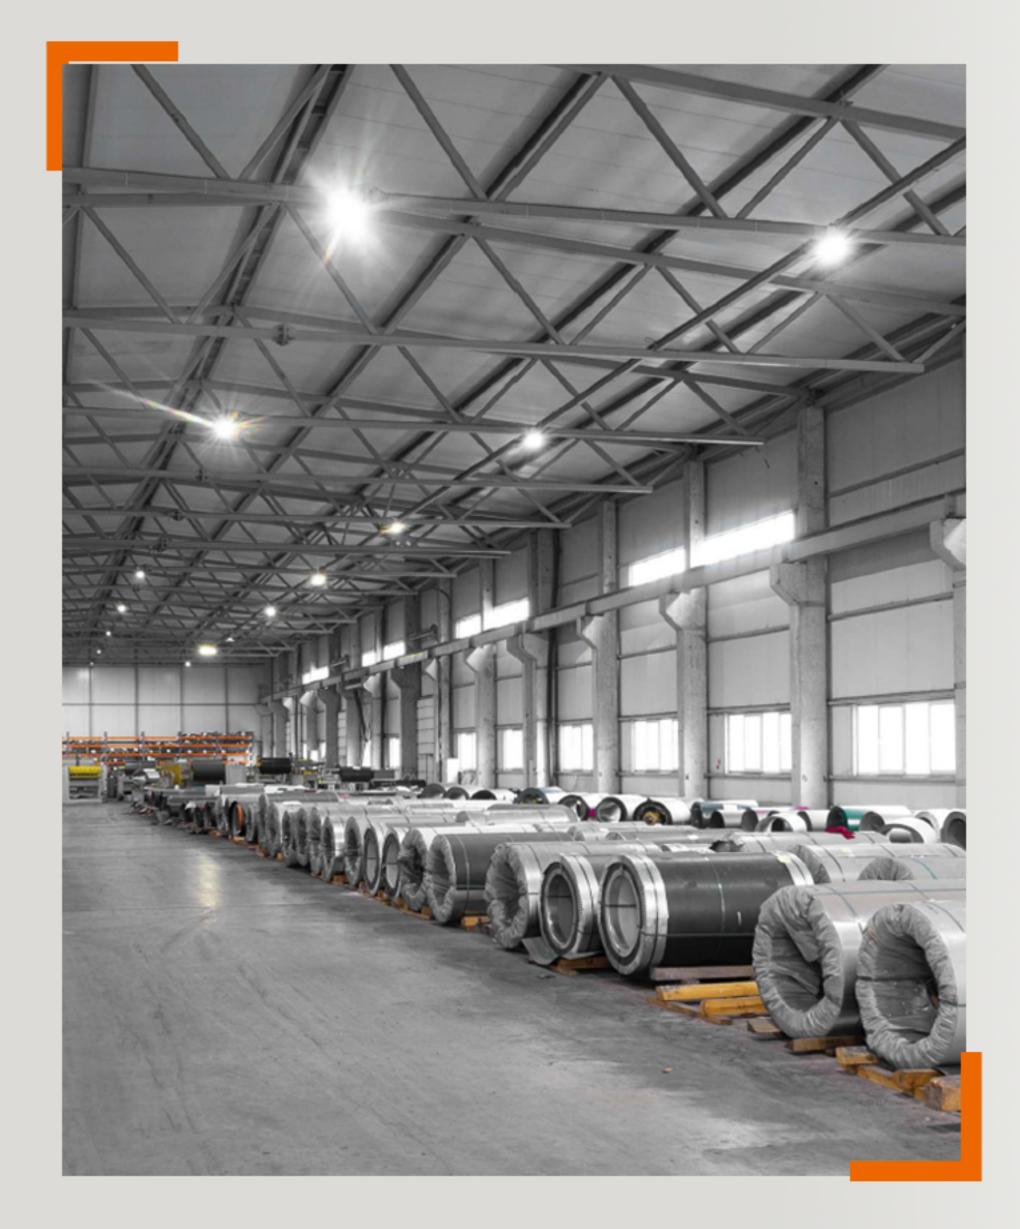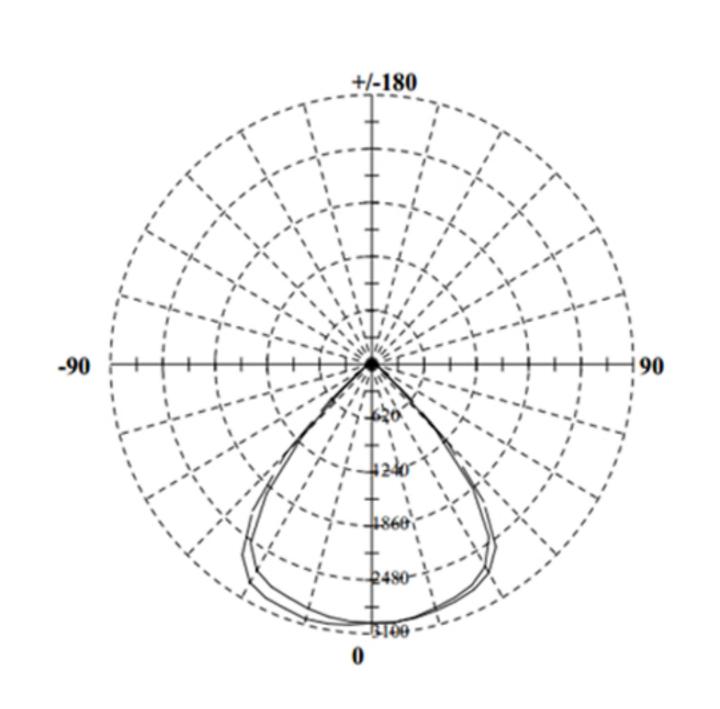## Description

- Made of Aluminum materil and poder coated surface finihsed, that stand out all kinds of weather.
- Excellent performance make high lumen output. Easy Installation.
- Widely used in commercial and residential applications.
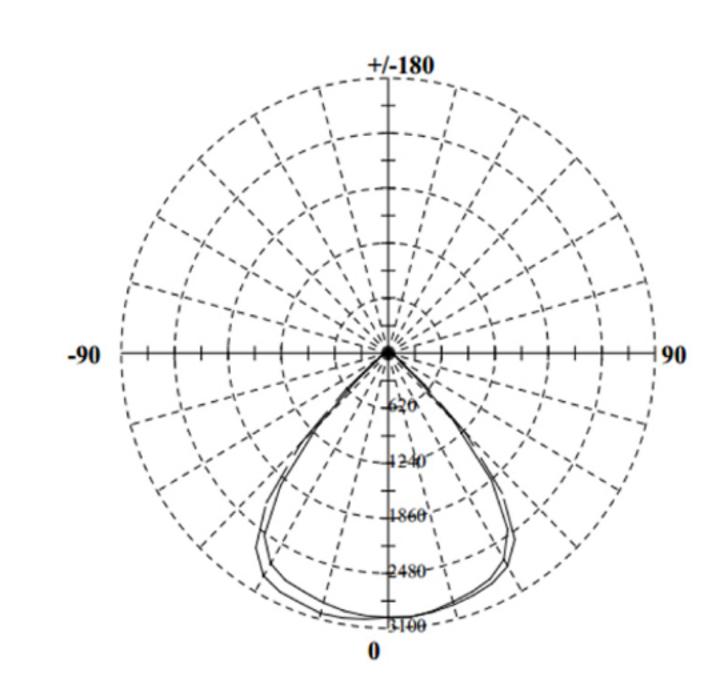- Warranty 3-5 years.