

LEDLIGHT SKYING



CAR



MOBILE



TV



POWER BANK



EXTENTION



PLUG

SKYING® *easy life*

نعاني من اضطرابات تحكم الإضاءة التقليدية بنا كبشر , وارتفاع أسعار خيارات الإضاءة الإضافية الأخرى , مع تقليل مميزات مهمة جدا كالتحكم بقوة وشدة الإضاءة ولونها وموقعها وإلى آخر المشاكل الخاصة بقرائك لهذا النص صباحاً أو مساءً

يشتكى البعض من صداع مزمن أو اعتلال بالحاله المزاجية , أو إحتياج لإضاءة تفهم رغبته البسيطة , ويكون مضطر لتحمل الحال المتوفر في ذلك الموقع مع الأسف

تنتهج هذه المنتجات مبدأ إضافة السعادة بشكل معياري لكافة مستويات البشر , وتتميز بقيم عميقة من أهمها تعدد الإستخدامات , ومواكبة التطور التكنولوجي , بالسعر المناسب لأداء يفوق التوقعات بجودة راقية تليق بمستخدميها

Make your
world colorful

لَوْنٌ
عَالَمَكَ

RGB SOUND SKYING



Product Name : RGB SOUND SKYING

Model Number : W2023-SKCK-2

Product size : 12mm (width) *36mm (height) *4.8 mm (thickness)

Product Color : RGB

The working voltage : 4V-6V

Rated voltage 5V, less than 4V This product may work abnormally, greater than 6V, may cause permanent damage to this product.

Working current :

When the LED is fully turned on in dark light, the workflow is 70mA, and the maximum impulse current that can withstand is 300mA;


Maximum power during operation : 0.36W

Product functions :

This product uses USB power supply ,Compatible with computer charger, charging bank, and USB interface on the cable board.

After plugging in the USB power, the product will determine whether to turn on the LED through the light-sensitive component. the LED will turn off when the light line is strong, the LED will turn on when the light is weak.

The light color is determined by 13 pieces of 3014 light beads on the light board. Including but not limited to: White, warm white, pink, purple, blue, green, yellow, ultraviolet and so on.



منتج اضاءة متعدد الاستخدامات , وحدة اضاءة تحمل جميع الألوان الرئيسية RGB تتميز بأنها تعمل على اي منفذ او مخرج USB , كما يتوفر محول لها لمخارج الـ Type-c والـ iPhone , تستطيع تحويلها للاستشعار الصوتي حيث تعمل , الاضاءة بحسب الصوت المحيط لها , يتم تغيير الالوان باللمس من خلف المنتج , تتحكم بقوة الاضاءة (تقليل او زيادة) الاضاءة من خلال اللمس المطول خلف المنتج (دبمر)

مقاومة للصدمات وظروف الاستخدام المختلفة يستطيع استخدامها كل الجنسين من ٧سنوات الى ٧٠ سنة

يتوفر بها مكان خاص للتعليق لاستخدامها مع المفاتيح الخاصة تعتبر أصغر وحدة اضاءة كحجم وهي اكثر وحدة اضاءة متعددة الوظائف

استخداماتها : السيارة / المنزل / بطارية تحويلها الى كشاف / الجوال توصيله كهربائية / كمبيوتر / شاشة تلفاز / واي منفذ USB

ألوان حياتك صار تقدر تسمعها مع سكاينج



RGB SOUND SKYING



DANCING LEDLIGHT SKYING



CONTROL
SWITCH



8 COLOR
CHANGE



ENVIRONMENT
FRIENDLY

Product Name : DANCING LED LIGHT

Model Number : W2023-CK-1

Product size : 12mm (width) *42mm (height) *6.5mm (thickness)

Product Color : RGB

The working voltage : 4V-6V

Rated voltage 5V, less than 4V this product may work abnormally, Greater than 6V May cause permanent damage to the product.

Working current :

Red, green, blue monochrome on the current is 75mA, The current of the White color is 220MA when the red, green and blue three colors are bright at the same time and the gradient current of seven colors will fluctuate around 165mA.

Maximum power during operation : 1.2W

Product functions :

This product uses USB power supply, compatible with computers, chargers, power banks, and USB interfaces on the cable board.

This product can switch the lighting mode by touching the top of the light panel.

The light mode has a blackout memory .



منتج اضاءة متعدد الاستخدامات , وحدة اضاءة متعددة الالوان والخواص تتميز بأنها تعمل على اي منفذ او مخرج USB , كما يتوفر محول لها لمخارج الـ Type-c والـ iPhone , يتم تغيير الالوان باللمس من خلف المنتج, تتحكم بقوة الاضاءة (تقليل او زيادة) الاضاءة من خلال اللمس المطول خلف المنتج (ديمر) مقاومة للصدمات وظروف الاستخدام المختلفة يستطيع استخدامها كل الجنسين من ٧ سنوات الى ٧٠ سنة يتوفر بها مكان خاص للتعليق لاستخدامها مع المفاتيح الخاصة تعتبر أصغر وحدة اضاءة كحجم وهي اكثر وحدة اضاءة متعددة الوظائف

استخداماتها : السيارة / المنزل / بطارية تحويلها الى كشاف / الجوال توصيله كهر بآئية / كمبيوتر / شاشة تلفاز / واي منفذ USB

الألوان تصنع إبتسامتكم



DANCING LEDLIGHT SKYING



CONTROL
SWITCH



8 COLOR
CHANGE



ENVIRONMENT
FRIENDLY

PARTY LEDLIGHT SKYING



Product Name : PARTY LED LIGHT

Model Number : W2023-CK-1

Product size : 12mm (width) *42mm (height) *6.5mm (thickness)

Product Color : RGB

The working voltage : 4V-6V

Rated voltage 5V, less than 4V this product may work abnormally, Greater than 6V May cause permanent damage to the product.

Working current :

Red, green, blue monochrome on the current is 75mA, The current of the White color is 220MA when the red, green and blue three colors are bright at the same time and the gradient current of seven colors will fluctuate around 165mA.


Maximum power during operation : 1.2W

Product functions :

This product uses USB power supply, compatible with computers, chargers, power banks, and USB interfaces on the cable board.

This product can switch the lighting mode by touching the top of the light panel.

The light mode has a blackout memory .



منتج اضاءة متعدد الاستخدامات , وحدة اضاءة متعددة الالوان والخواص تستطيع تحويلها للاستشعار الصوتي حيث تعمل الاضاءة بحسب الصوت المحيط لها تتميز بأنها تعمل على اي منفذ او مخرج USB , كما يتوفر محول لها لمخارج الـ Type-c والـ iPhone , يتم تغيير الالوان باللمس من خلف المنتج , تتحكم بقوة الاضاءة (تقليل او زيادة) الاضاءة من خلال اللمس المطول خلف المنتج (ديمر)

مقاومة للصدمات وظروف الاستخدام المختلفة
يستطيع استخدامها كل الجنسين من ٧ سنوات الى ٧٠ سنة
يتوفر بها مكان خاص للتعليق لاستخدامها مع المفاتيح الخاصة
تعتبر أصغر وحدة اضاءة كحجم وهي اكثر وحدة اضاءة متعددة الوظائف

استخداماتها: السيارة / المنزل / بطارية تحويلها الى كشاف / الجوال توصيله كهربائية / كمبيوتر / شاشة تلفاز / واي منفذ USB

الإحتفال والبهجة أسهل مع سكاينج



PARTY LEDLIGHT
SKYING



CONTROL
SWITCH



8 COLOR
CHANGE



ENVIRONMENT
FRIENDLY

UV LEDLIGHT SKYING



Product Name : UV LED LIGHT

Model Number : W2023-CK-2

Product size : 12mm (width) *42mm (height) *4.5mm (thickness)

Product Color : UV

The working voltage : 4V-6V

Rated voltage 5V, less than 4V This product may work abnormally ,greater than 6V, may cause permanent damage to this product .

Working current :

The working current is 230mA when the light is full , and the working current is between 60-230mA when the light is low .

Maximum power during operation : 1.2W

Product functions :

This product is powered by USB, compatible with computer, Charger, charging treasure, as well as the cable plug on the USB interface This product power-on the default is the off state, the touch will switch in the on and off state.

When the light is on, long press on the touch point will adjust the brightness of the light.

The light color is determined by 6 pieces of 5730 light beads on the light board .Including but not limited to: white warm white powder violet blue green yellow ultraviolet ray and so on.



منتج اضاءة متعدد الاستخدامات , وحدة اضاءة تنتج درجة ضوء فوق البنفسجية تتميز بأنها تعمل على اي منفذ او مخرج USB , كما يتوفر محول لها لمخارج الـ Type-c والـ iPhone , يتم تشغيل الاضاءة من الخلف من خلال اللمس , تتحكم بقوة الاضاءة (تقليل او زيادة) الاضاءة من خلال اللمس المطول خلف المنتج (دبلمر)

مقاومة للصدمات وظروف الاستخدام المختلفة
يستطيع استخدامها كل الجنسين من ٧ سنوات الى ٧٠ سنة
يتوفر بها مكان خاص للتعليق لاستخدامها مع المفاتيح الخاصة
تعتبر أصغر وحدة اضاءة كحجم وهي أكثر وحدة اضاءة متعددة الوظائف

استخداماتها : السيارة / المنزل / بطارية تحويلها الى كشاف / الجوال توصيله كهربائية / كمبيوتر / شاشة تلفاز / واي منفذ USB



UV LEDLIGHT SKYING



إضاءة لما خلف الكواليس

MOON LIGHT WARM SKYING



WARM
LIGHT



PHOTOCELL
OPTION



ENVIRONMENT
FRIENDLY

Product Name : Moon Light Warm

Model Number : W2023-GG-1

Product size : 12mm (width) *36mm (height) *4.8 mm (thickness)

Product Color : Warm

The working voltage : 4V-6V

Rated voltage 5V, less than 4V This product may work abnormally, greater than 6V, may cause permanent damage to this product.

Working current :

When the LED is fully turned on in dark light, the workflow is 70mA, and the maximum impulse current that can withstand is 300mA;

Maximum power during operation : 0.36W

Product functions :

This product uses USB power supply ,Compatible with computer charger, charging bank, and USB interface on the cable board.

After plugging in the USB power, the product will determine whether to turn on the LED through the light-sensitive component. the LED will turn off when the light line is strong, the LED will turn on when the light is weak.

The light color is determined by 13 pieces of 3014 light beads on the light board. Including but not limited to: White, warm white, pink, purple, blue, green, yellow, ultraviolet and so on.

وحدة إضاءة , على شكل قمر لون اصفر مع كاشف إستشعار

إضاءة للتحكم الآلي , يسهل الحياة من خلال تشغيل الوحدة اثناء انعدام النور تلقائياً , ويتم اطفائها تلقائياً عند توفر الإضاءة الطبيعية او الصناعية , مقاومة للصدمات وظروف الاستخدام المختلفة

يستطيع استخدامها كل الجنسين من ٧سنوات الى ٧٠ سنة تعتبر أصغر وحدة اضاءة كحجم وهي اكثر وحدة اضاءة متعددة الوظائف

إستخداماتها : السيارة / المنزل / بطارية / الجوال / توصيله كهربائية / كمبيوتر / شاشة تلفاز / واي منفذ USB

التغيير إحتياج كُونِي وهو متوفر الآن



MOON LIGHT WARM
SKYING



WARM
LIGHT



PHOTOCELL
OPTION



ENVIRONMENT
FRIENDLY

MOON LIGHT BLUE SKYING



BLUE
LIGHT



PHOTOCELL
OPTION



ENVIRONMENT
FRIENDLY

Product Name : Moon Light Blue

Model Number : W2023-GG-1

Product size : 12mm (width) *36mm (height) *4.8 mm (thickness)

Product Color : Blue

The working voltage : 4V-6V

Rated voltage 5V, less than 4V This product may work abnormally, greater than 6V, may cause permanent damage to this product.

Working current :

When the LED is fully turned on in dark light, the workflow is 70mA, and the maximum impulse current that can withstand is 300mA;

Maximum power during operation : 0.36W

Product functions :

This product uses USB power supply ,Compatible with computer charger, charging bank, and USB interface on the cable board.

After plugging in the USB power, the product will determine whether to turn on the LED through the light-sensitive component. the LED will turn off when the light line is strong, the LED will turn on when the light is weak.

The light color is determined by 13 pieces of 3014 light beads on the light board.Including but not limited to: White, warm white, pink, purple, blue, green, yellow, ultraviolet and so on.

وحدة إضاءة , على شكل قمر لون ازرق مع كاشف استشعار

إضاءة للتحكم الآلي , يسهل الحياة من خلال تشغيل الوحدة اثناء انعدام النور تلقائياً , ويتم اطفائها تلقائياً عند توفر الإضاءة الطبيعية او الصناعية , مقاومة للصدمات وظروف الاستخدام المختلفة

يستطيع استخدامها كل الجنسين من ٧ سنوات الى ٧٠ سنة تعتبر أصغر وحدة اضاءة كحجم وهي اكثر وحدة اضاءة متعددة الوظائف

استخداماتها : السيارة / المنزل / بطارية / الجوال / توصيله كهربائية / كمبيوتر / شاشة تلفاز / واي منفذ USB

الأحلام ألوانها كثيرة جمعها لك باتقان



MOON LIGHT BLUE
SKYING



BLUE
LIGHT



PHOTOCELL
OPTION



ENVIRONMENT
FRIENDLY

MOON LIGHT PINK SKYING



PINK
LIGHT



PHOTOCELL
OPTION



ENVIRONMENT
FRIENDLY

Product Name : Moon Light Pink

Model Number : W2023-GG-1

Product size : 12mm (width) *36mm (height) *4.8 mm (thickness)

Product Color : Pink

The working voltage : 4V-6V

Rated voltage 5V, less than 4V This product may work abnormally, greater than 6V, may cause permanent damage to this product.

Working current :

When the LED is fully turned on in dark light, the workflow is 70mA, and the maximum impulse current that can withstand is 300mA;

Maximum power during operation : 0.36W

Product functions :

This product uses USB power supply ,Compatible with computer charger, charging bank, and USB interface on the cable board.

After plugging in the USB power, the product will determine whether to turn on the LED through the light-sensitive component. the LED will turn off when the light line is strong, the LED will turn on when the light is weak.

The light color is determined by 13 pieces of 3014 light beads on the light board.Including but not limited to: White, warm white, pink, purple, blue, green, yellow, ultraviolet and so on.

وحدة إضاءة , على شكل قمر لون بنفسجي مع كاشف إستشعار

إضاءة للتحكم الآلي , يسهل الحياة من خلال تشغيل الوحدة أثناء انعدام النور تلقائياً , ويتم اطفائها تلقائياً عند توفر الإضاءة الطبيعية او الصناعية , مقاومة للصدمات وظروف الاستخدام المختلفة

يستطيع استخدامها كل الجنسين من ٧سنوات الى ٧٠ سنة تعتبر أصغر وحدة اضاءة كحجم وهي اكثر وحدة اضاءة متعددة الوظائف

إستخداماتها : السيارة / المنزل / بطارية / الجوال / توصيله كهربائية / كمبيوتر / شاشة تلفاز / واي منفذ USB



MOON LIGHT PINK SKYING



PINK
LIGHT



PHOTOCELL
OPTION



ENVIRONMENT
FRIENDLY

LED DAYLIGHT SKYING



WHITE
LIGHT



DIM
THE LIGHT



ENVIRONMENT
FRIENDLY

Product Name : LED DAY LIGHT

Model Number : W2023-CK-2

Product size : 12mm (width) *42mm (height) *4.5mm (thickness)

Product Color : White

The working voltage : 4V-6V

Rated voltage 5V, less than 4V This product may work abnormally ,greater than 6V, may cause permanent damage to this product .

Working current :

The working current is 230mA when the light is full , and the working current is between 60-230mA when the light is low .

Maximum power during operation : 1.2W

Product functions :

This product is powered by USB, compatible with computer, Charger, charging treasure, as well as the cable plug on the USB interface This product power-on the default is the off state, the touch will switch in the on and off state.

When the light is on, long press on the touch point will adjust the brightness of the light.

The light color is determined by 6 pieces of 5730 light beads on the light board .Including but not limited to: white warm white powder violet blue green yellow ultraviolet ray and so on.

منتج اضاءة متعدد الاستخدامات , وحدة اضاءة باللون الابيض تتميز بأنها تعمل على اي منفذ او مخرج USB , كما يتوفر محول لها لمخارج الـ Type-c والـ iPhone , يتم تشغيل الاضاءة من الخلف من خلال اللمس , تتحكم بقوة الاضاءة (تقليل او زيادة) الاضاءة من خلال اللمس المطول خلف المنتج (ديمر)

مقاومة للصدمات وظروف الاستخدام المختلفة
يستطيع استخدامها كل الجنسين من ٧ سنوات الى ٧٠ سنة
يتوفر بها مكان خاص للتعليق لاستخدامها مع المفاتيح الخاصة
تعتبر أصغر وحدة اضاءة كحجم وهي اكثر وحدة اضاءة متعددة الوظائف

استخداماتها : السيارة / المنزل / بطارية تحويلها الى كشاف / الجوال توصيله كهربائية / كمبيوتر / شاشة تلفاز / واي منفذ USB

احتياجاتك الكبيرة أصبحت سهلة وبسيطة



LED DAYLIGHT SKYING



WHITE
LIGHT



DIM
THE LIGHT



ENVIRONMENT
FRIENDLY

LEDWARM LIGHT SKYING



Product Name : LED WARM LIGHT

Model Number : W2023-CK-1

Product size : 12mm (width) *42mm (height) *6.5mm (thickness)

Product Color : Warm

The working voltage : 4V-6V

Rated voltage 5V, less than 4V this product may work abnormally, Greater than 6V May cause permanent damage to the product.

Working current :

Red, green, blue monochrome on the current is 75mA, The current of the White color is 220mA when the red, green and blue three colors are bright at the same time and the gradient current of seven colors will fluctuate around 165mA.

Maximum power during operation : 1.2W

Product functions :

This product uses USB power supply, compatible with computers, chargers, power banks, and USB interfaces on the cable board.

This product can switch the lighting mode by touching the top of the light panel.

The light mode has a blackout memory .



منتج اضاءة متعدد الاستخدامات , وحدة اضاءة باللون الاصفر تتميز بأنها تعمل على اي منفذ او مخرج USB , كما يتوفر محول لها لمخارج الـ Type-c والـ Phone , يتم تشغيل الاضاءة من الخلف من خلال اللمس , تتحكم بقوة الاضاءة (تقليل او زيادة) الاضاءة من خلال اللمس المطول خلف المنتج (ديمر)

مقاومة للصدمات وظروف الاستخدام المختلفة
يستطيع استخدامها كل الجنسين من ٧ سنوات الى ٧٠ سنة
يتوفر بها مكان خاص للتعليق لاستخدامها مع المفاتيح الخاصة
تعتبر أصغر وحدة اضاءة كحجم وهي اكثر وحدة اضاءة متعددة الوظائف

استخداماتها : السيارة / المنزل / بطارية تحويلها الى كشاف / الجوال توصيله كهربائية / كمبيوتر / شاشة تلفاز / واي منفذ USB

إضاءة تستخرج فنك الداخلي



LEDWARM LIGHT SKYING



TYBE-C ADABTOR SKYING



Product Name : TYPE-C Adaptor

Model Number : ADTC

Product Color : Black

Use : Android devices & New I Phone Version

Type :
"Adaptor
type-C to USB USB3.0"

تعدد الوظائف والأجهزة الالكترونية ومنافذ الإيصال لما بينها , للحصول على منافع متعددة في حياتنا اليومية , المحول من USB الى Type-c , لتكون الحياة أسهل مع سكاينج

قطعة قد تحول بينك وبين حاجتك



TYBE-C ADABTOR 
SKYING

LIGHTNING ADABTOR SKYING



Product Name : LIGHTNING Adaptor

Model Number : ADLG

Product Color : Black

Use : I Phone Old Version

Type :
"Adaptor
LIGHTNING to USB USB3.0"


تعدد الوظائف والأجهزة الإلكترونية ومنافذ الإيصال لها بينها , للحصول على منافع متعددة في حياتنا اليومية , المحول من USB الى LIGHTNING , لتكون الحياة أسهل مع سكاينج

إستكشف إمكانيات هاتفك الشخصي مع مع سكاينج



LIGHTNING ADABTOR 
SKYING


| | | | |
|---------------|--------------|--------------------|---------|
| Temperature: | 23°C | Relative Humidity: | 40% |
| Test Voltage: | AC 230V 50Hz | Pressure: | 1013hPa |
| Test Mode: | Mode 1 | Polarization: | None |

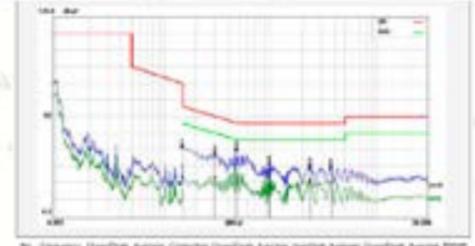

| No. | Frequency | Class/Pass | Average | Correction | Class/Pass | Average | Correction | Average | Class/Pass | Average | Correction | Average | Class/Pass |
|-----|-----------|------------|---------|------------|------------|---------|------------|---------|------------|---------|------------|---------|------------|
| 1 | 2000 | dBm | dBm | dB | 2000 | dBm | dBm | dB | 2000 | dBm | dBm | dB | 2000 |
| 1 | 2000 | 27.11 | 27.11 | -0.20 | 27.11 | 27.11 | -0.20 | 27.11 | 27.11 | 27.11 | -0.20 | 27.11 | Pass |
| 2 | 2000 | 27.11 | 27.11 | -0.20 | 27.11 | 27.11 | -0.20 | 27.11 | 27.11 | 27.11 | -0.20 | 27.11 | Pass |
| 3 | 2000 | 27.11 | 27.11 | -0.20 | 27.11 | 27.11 | -0.20 | 27.11 | 27.11 | 27.11 | -0.20 | 27.11 | Pass |
| 4 | 2000 | 27.11 | 27.11 | -0.20 | 27.11 | 27.11 | -0.20 | 27.11 | 27.11 | 27.11 | -0.20 | 27.11 | Pass |
| 5 | 2000 | 27.11 | 27.11 | -0.20 | 27.11 | 27.11 | -0.20 | 27.11 | 27.11 | 27.11 | -0.20 | 27.11 | Pass |
| 6 | 2000 | 27.11 | 27.11 | -0.20 | 27.11 | 27.11 | -0.20 | 27.11 | 27.11 | 27.11 | -0.20 | 27.11 | Pass |
| 7 | 2000 | 27.11 | 27.11 | -0.20 | 27.11 | 27.11 | -0.20 | 27.11 | 27.11 | 27.11 | -0.20 | 27.11 | Pass |
| 8 | 2000 | 27.11 | 27.11 | -0.20 | 27.11 | 27.11 | -0.20 | 27.11 | 27.11 | 27.11 | -0.20 | 27.11 | Pass |
| 9 | 2000 | 27.11 | 27.11 | -0.20 | 27.11 | 27.11 | -0.20 | 27.11 | 27.11 | 27.11 | -0.20 | 27.11 | Pass |
| 10 | 2000 | 27.11 | 27.11 | -0.20 | 27.11 | 27.11 | -0.20 | 27.11 | 27.11 | 27.11 | -0.20 | 27.11 | Pass |

Above 30MHz Test Results

| | | | |
|---------------|--------------|--------------------|------------|
| Temperature: | 23°C | Relative Humidity: | 40% |
| Test Voltage: | AC 230V 50Hz | Pressure: | 1013hPa |
| Test Mode: | Mode 1 | Polarization: | Horizontal |

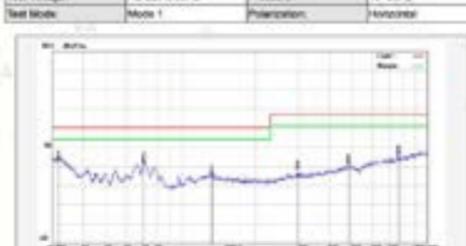

| No. | Frequency | Class/Pass | Average | Correction | Class/Pass | Average | Correction | Average | Class/Pass | Average | Correction | Average | Class/Pass |
|-----|-----------|------------|---------|------------|------------|---------|------------|---------|------------|---------|------------|---------|------------|
| 1 | 2000 | dBm | dBm | dB | 2000 | dBm | dBm | dB | 2000 | dBm | dBm | dB | 2000 |
| 1 | 2000 | 27.11 | 27.11 | -0.20 | 27.11 | 27.11 | -0.20 | 27.11 | 27.11 | 27.11 | -0.20 | 27.11 | Pass |
| 2 | 2000 | 27.11 | 27.11 | -0.20 | 27.11 | 27.11 | -0.20 | 27.11 | 27.11 | 27.11 | -0.20 | 27.11 | Pass |
| 3 | 2000 | 27.11 | 27.11 | -0.20 | 27.11 | 27.11 | -0.20 | 27.11 | 27.11 | 27.11 | -0.20 | 27.11 | Pass |
| 4 | 2000 | 27.11 | 27.11 | -0.20 | 27.11 | 27.11 | -0.20 | 27.11 | 27.11 | 27.11 | -0.20 | 27.11 | Pass |
| 5 | 2000 | 27.11 | 27.11 | -0.20 | 27.11 | 27.11 | -0.20 | 27.11 | 27.11 | 27.11 | -0.20 | 27.11 | Pass |
| 6 | 2000 | 27.11 | 27.11 | -0.20 | 27.11 | 27.11 | -0.20 | 27.11 | 27.11 | 27.11 | -0.20 | 27.11 | Pass |
| 7 | 2000 | 27.11 | 27.11 | -0.20 | 27.11 | 27.11 | -0.20 | 27.11 | 27.11 | 27.11 | -0.20 | 27.11 | Pass |
| 8 | 2000 | 27.11 | 27.11 | -0.20 | 27.11 | 27.11 | -0.20 | 27.11 | 27.11 | 27.11 | -0.20 | 27.11 | Pass |
| 9 | 2000 | 27.11 | 27.11 | -0.20 | 27.11 | 27.11 | -0.20 | 27.11 | 27.11 | 27.11 | -0.20 | 27.11 | Pass |
| 10 | 2000 | 27.11 | 27.11 | -0.20 | 27.11 | 27.11 | -0.20 | 27.11 | 27.11 | 27.11 | -0.20 | 27.11 | Pass |

Certificate

Certificate Number: UNIA2312011ER-11

Product: SKYING USB
Applicant: Works and trade Co. LTD
 King Road ST cross 4 rd/door 31952 pu/199 eastern province Sindh
 Arabia
Manufacturer: [Redacted]
Model No.: W2023-0G-1
Trade Mark: N/A
Test Methods: EN IEC 55015:2019+A11:2020
 EN IEC 61000-3-2:2019+A1:2021
 EN 61000-3-3:2013+A2:2021+AC:2022-01
 EN IEC 61547:2023

Certificate of Compliance

The laboratory tested the product provided by the applicant according to the above test methods. According to the test results, the product conforms to EMC Directive (2014/53/EU) issued by the European Commission. It is possible to use CE marking to demonstrate the compliance with EMC Directive. The certificate applies to the tested sample above mentioned only and shall not imply an assessment of the whole production. It is only valid in connection with the test report number: UNIA2312011ER-11.

Nov. 17, 2023
Issue Date

Hoffer Lee
Hoffer Lee

Shenzhen United Testing Technology Co., Ltd.
 Shenzhen 518102CHN, No. 107, Baoxing High Tech Park, Yantian Community, Longhua District, Longhua District, Shenzhen, Guangdong China 518109
 Guangzhou No. 471-1, Industrial Road, Shatin, Shatin Street, Plover Street, Guangzhou, Guangdong, China 510440
 Tel: +86 755 86288994 Fax: +86 755 86288995
 Web: www.unitec.com.cn E-mail: unitec@unitec.com.cn

Certificate

Certificate Number: UNIA2312011ER-11

Product: SKYING USB
Applicant: Works and trade Co. LTD
 King Road ST cross 4 rd/door 31952 pu/199 eastern province Sindh
 Arabia
Manufacturer: [Redacted]
Model No.: W2023-CK-1, W2023-CK-2
Trade Mark: N/A
Test Methods: EN IEC 55015:2019+A11:2020
 EN IEC 61000-3-2:2019+A1:2021
 EN 61000-3-3:2013+A2:2021+AC:2022-01
 EN IEC 61547:2023

Certificate of Compliance


The laboratory tested the product provided by the applicant according to the above test methods. According to the test results, the product conforms to EMC Directive (2014/53/EU) issued by the European Commission. It is possible to use CE marking to demonstrate the compliance with EMC Directive. The certificate applies to the tested sample above mentioned only and shall not imply an assessment of the whole production. It is only valid in connection with the test report number: UNIA2312011ER-11.

Nov. 17, 2023
Issue Date

Hoffer Lee
Hoffer Lee


Shenzhen United Testing Technology Co., Ltd.
 Shenzhen 518102CHN, No. 107, Baoxing High Tech Park, Yantian Community, Longhua District, Longhua District, Shenzhen, Guangdong China 518109
 Guangzhou No. 471-1, Industrial Road, Shatin, Shatin Street, Plover Street, Guangzhou, Guangdong, China 510440
 Tel: +86 755 86288994 Fax: +86 755 86288995
 Web: www.unitec.com.cn E-mail: unitec@unitec.com.cn

| | | | |
|---------------|--------------|--------------------|----------|
| Temperature: | 23°C | Relative Humidity: | 40% |
| Test Voltage: | AC 230V 50Hz | Pressure: | 1013hPa |
| Test Mode: | Mode 1 | Polarization: | Vertical |

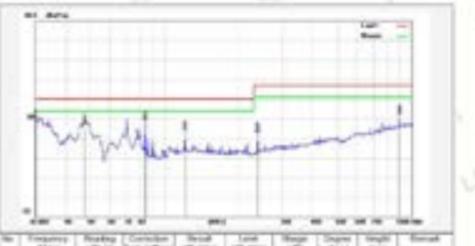


| No. | Frequency | Class/Pass | Average | Correction | Class/Pass | Average | Correction | Average | Class/Pass | Average | Correction | Average | Class/Pass |
|-----|-----------|------------|---------|------------|------------|---------|------------|---------|------------|---------|------------|---------|------------|
| 1 | 2000 | dBm | dBm | dB | 2000 | dBm | dBm | dB | 2000 | dBm | dBm | dB | 2000 |
| 1 | 2000 | 27.11 | 27.11 | -0.20 | 27.11 | 27.11 | -0.20 | 27.11 | 27.11 | 27.11 | -0.20 | 27.11 | Pass |
| 2 | 2000 | 27.11 | 27.11 | -0.20 | 27.11 | 27.11 | -0.20 | 27.11 | 27.11 | 27.11 | -0.20 | 27.11 | Pass |
| 3 | 2000 | 27.11 | 27.11 | -0.20 | 27.11 | 27.11 | -0.20 | 27.11 | 27.11 | 27.11 | -0.20 | 27.11 | Pass |
| 4 | 2000 | 27.11 | 27.11 | -0.20 | 27.11 | 27.11 | -0.20 | 27.11 | 27.11 | 27.11 | -0.20 | 27.11 | Pass |
| 5 | 2000 | 27.11 | 27.11 | -0.20 | 27.11 | 27.11 | -0.20 | 27.11 | 27.11 | 27.11 | -0.20 | 27.11 | Pass |
| 6 | 2000 | 27.11 | 27.11 | -0.20 | 27.11 | 27.11 | -0.20 | 27.11 | 27.11 | 27.11 | -0.20 | 27.11 | Pass |
| 7 | 2000 | 27.11 | 27.11 | -0.20 | 27.11 | 27.11 | -0.20 | 27.11 | 27.11 | 27.11 | -0.20 | 27.11 | Pass |
| 8 | 2000 | 27.11 | 27.11 | -0.20 | 27.11 | 27.11 | -0.20 | 27.11 | 27.11 | 27.11 | -0.20 | 27.11 | Pass |
| 9 | 2000 | 27.11 | 27.11 | -0.20 | 27.11 | 27.11 | -0.20 | 27.11 | 27.11 | 27.11 | -0.20 | 27.11 | Pass |
| 10 | 2000 | 27.11 | 27.11 | -0.20 | 27.11 | 27.11 | -0.20 | 27.11 | 27.11 | 27.11 | -0.20 | 27.11 | Pass |

| | | | |
|---------------|--------------|--------------------|------------|
| Temperature: | 23°C | Relative Humidity: | 40% |
| Test Voltage: | AC 230V 50Hz | Pressure: | 1013hPa |
| Test Mode: | Mode 1 | Polarization: | Horizontal |

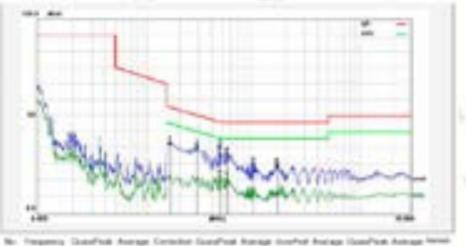

| No. | Frequency | Class/Pass | Average | Correction | Class/Pass | Average | Correction | Average | Class/Pass | Average | Correction | Average | Class/Pass |
|-----|-----------|------------|---------|------------|------------|---------|------------|---------|------------|---------|------------|---------|------------|
| 1 | 2000 | dBm | dBm | dB | 2000 | dBm | dBm | dB | 2000 | dBm | dBm | dB | 2000 |
| 1 | 2000 | 27.11 | 27.11 | -0.20 | 27.11 | 27.11 | -0.20 | 27.11 | 27.11 | 27.11 | -0.20 | 27.11 | Pass |
| 2 | 2000 | 27.11 | 27.11 | -0.20 | 27.11 | 27.11 | -0.20 | 27.11 | 27.11 | 27.11 | -0.20 | 27.11 | Pass |
| 3 | 2000 | 27.11 | 27.11 | -0.20 | 27.11 | 27.11 | -0.20 | 27.11 | 27.11 | 27.11 | -0.20 | 27.11 | Pass |
| 4 | 2000 | 27.11 | 27.11 | -0.20 | 27.11 | 27.11 | -0.20 | 27.11 | 27.11 | 27.11 | -0.20 | 27.11 | Pass |
| 5 | 2000 | 27.11 | 27.11 | -0.20 | 27.11 | 27.11 | -0.20 | 27.11 | 27.11 | 27.11 | -0.20 | 27.11 | Pass |
| 6 | 2000 | 27.11 | 27.11 | -0.20 | 27.11 | 27.11 | -0.20 | 27.11 | 27.11 | 27.11 | -0.20 | 27.11 | Pass |
| 7 | 2000 | 27.11 | 27.11 | -0.20 | 27.11 | 27.11 | -0.20 | 27.11 | 27.11 | 27.11 | -0.20 | 27.11 | Pass |
| 8 | 2000 | 27.11 | 27.11 | -0.20 | 27.11 | 27.11 | -0.20 | 27.11 | 27.11 | 27.11 | -0.20 | 27.11 | Pass |
| 9 | 2000 | 27.11 | 27.11 | -0.20 | 27.11 | 27.11 | -0.20 | 27.11 | 27.11 | 27.11 | -0.20 | 27.11 | Pass |
| 10 | 2000 | 27.11 | 27.11 | -0.20 | 27.11 | 27.11 | -0.20 | 27.11 | 27.11 | 27.11 | -0.20 | 27.11 | Pass |

11.2 TEST SETUP



11.3 TEST PROCEDURE


- For EUT power supply
- The surge to be applied to the EUT power supply terminals via the capacitive coupling network. Coupling networks are required in order to avoid possible adverse effects on equipment not under test that may be powered by the same lines, and to provide sufficient decoupling impedance to the surge wave. The power cord between the EUT and the coupling/decoupling networks shall be 2 meters in length (or shorter).
- For test applied to unshielded unipolarly operated interconnection lines of EUT.
- The surge is applied to the lines via the capacitive coupling. The coupling/decoupling networks shall not influence the specified functional conditions of the EUT. The interconnection line between the EUT and the coupling/decoupling networks shall be 2 meters in length (or shorter).

10 ELECTRICAL FAST TRANSIENT IMMUNITY TEST (EFT)

10.1 TEST SPECIFICATION

| | |
|-----------------------|-------------------------------------------------|
| Basic Standard: | EN 61000-4-6 |
| Required Performance: | B |
| Test Voltage: | Power Line: 1 kV Signal/Control Line: 0.5 kV |
| Priority: | Positive & Negative |
| Impulse Frequency: | 0 kHz |
| Impulse Wave shape: | 0/50 ns |
| Burst Duration: | 15 ms |
| Burst Period: | 300 ms |
| Test Duration: | Test less than 2 min |

10.2 TEST SETUP



8.4 TEST RESULT

| | | | |
|---------------|--------------|--------------------|---------|
| Temperature: | 23°C | Relative Humidity: | 40% |
| Test Voltage: | AC 230V 50Hz | Pressure: | 1013hPa |
| Test Mode: | Mode 1 | | |


| Voltage | Coupling | Test Performance | Performance Result | Result (Pass/Fail) |
|---------|--------------------------------|------------------|--------------------|--------------------|
| ±kV | Contact Discharge | No function loss | A | Pass |
| ±kV | Indirect Discharge HCP (Front) | No function loss | A | Pass |
| ±kV | Indirect Discharge HCP (Left) | No function loss | A | Pass |
| ±kV | Indirect Discharge HCP (Back) | No function loss | A | Pass |
| ±kV | Indirect Discharge HCP (Right) | No function loss | A | Pass |
| ±kV | Indirect Discharge VCP (Front) | No function loss | A | Pass |
| ±kV | Indirect Discharge VCP (Left) | No function loss | A | Pass |
| ±kV | Indirect Discharge VCP (Back) | No function loss | A | Pass |
| ±kV | Indirect Discharge VCP (Right) | No function loss | A | Pass |
| ±kV | Air Discharge | No function loss | A | Pass |

9 RADIATED, RADIO-FREQUENCY, ELECTROMAGNETIC FIELD IMMUNITY TEST (RF)

9.1 TEST SPECIFICATION

| | |
|-----------------------|------------------------------------|
| Basic Standard: | EN 61000-4-3 |
| Required Performance: | A |
| Frequency Range: | 30 MHz ~1000 MHz |
| Field Strength: | 3 V/m |
| Modulation: | 1 kHz sine wave, 80% AM Modulation |
| Frequency Step: | 1 Hz of fundamental |
| Priority of Axes: | Horizontal and Vertical |
| Test Distance: | 3 m |
| Antenna Height: | 1.5 m |
| Shield Type: | 1.5x 10 ² dB/decade |

9.2 TEST SETUP

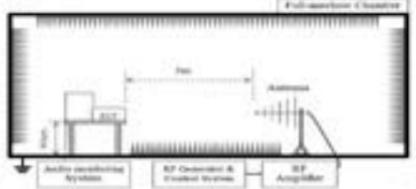

TOLL FOR FREE
0138952025

king Faisal St. Al Khobar
Saudi Arabia
watco@watco.com.sa



ROSH



   @watcoksa
www.watco.sa