
UFO HIGH BAY LIGHT



Description

- Made of aluminum material and powder coated surface finished, that stand out all kinds of weather.
- Excellent performance make high lumen output.
- Easy installation.
- Widely used in streets, commercial and residential applications.
- Warranty 3-5 years.

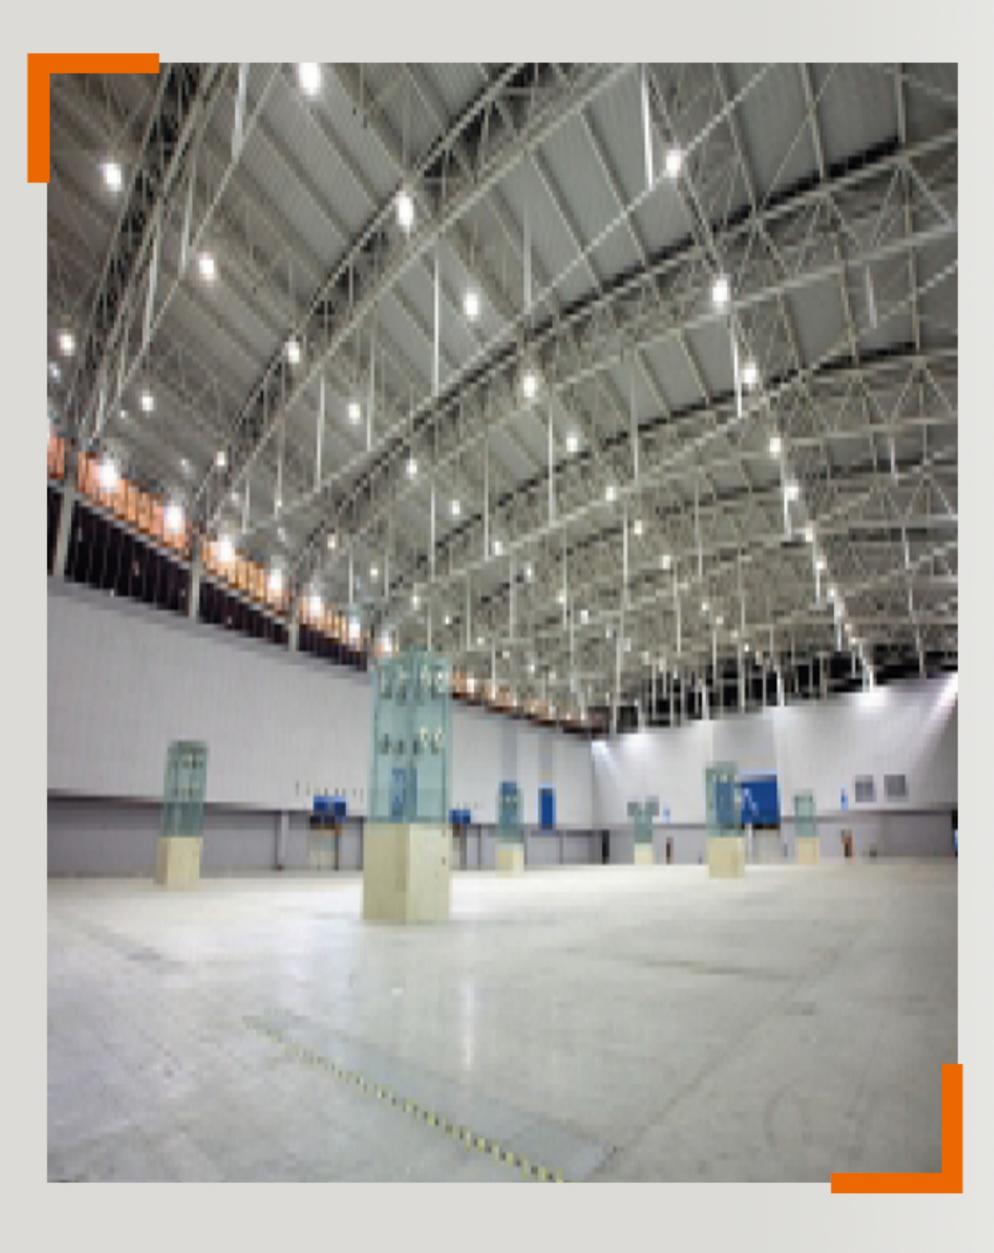

Outdoor / Indoor Lighting





DATA SHEET

Model No.:	U101-100W	U101-150W	U101-200W	U101-240W		
Power:	100W	150W	200W	240W		
Dimension:	ф255*H112 mm	φ255*H112 mm φ300*H118 mm φ350*H158 mm φ370*H158 mm				
Lumen:	14000lm	22000lm	28000lm	33600lm		
IP:	IP65					
Voltage Range:	120-270V					
LED:	SMD2835					
Material:	Aluminum+Lens					
LPW.:	140lm/w					
CCT:	3000-6500K					
CRI:	80					
Driver:	IP65 Driver					
PF:	>0.9					
Surge protect:	4KV					
Certification:	CE, CB					
Warranty:	3/5 Years					

UFO LED HIGH BAY LIGHT



Description

LED UP® The special design of the aluminium heat sink enhances the efficiency of hot and cold air exchange. Its service life is equivalent to that of the chip, which effectively reduces the temperature of the light source and ensures the stability of the light source and the extension of the life lighting fixture made with

source and the extension of the life lighting fixture made with high luminous effect in addition to high wattage with die casted aluminium.

Application

Suitable for urban and rural road, garden road, industrial park

Features

IP65

IK 1

90° (Optical 45°, 60°, 120°)

●pti•nal DALI 2.●

●pti•nal •~1•V Dimming H••k and Y•ke Installati•n

PC and AL Reflector



Outdoor Lighting



DATA SHEET

Lumen Efficacy	140Lm/W (Optional Max 210Lm/W)
ССТ	4000 K or 6500K
CRI	>80
ELECTRICAL SPECS	
Power	100, 150, 200 Watts
Input Voltage	220~240 Vac
Power Frequency	50/60 Hz
Power Factor	>0.95
Total Harmonic Distortion	<15%(@230V)
Insulation Grade	Class I
OTHER DETAILS Lifespan	≥50,000 Hours
Operating Temperature	-30°C~50°C
LED Driver Spec	SOSEN
LED Spec	SMD 2835
Optional Dimming	DALI,0-10V,PWM,Smart control management system
MECHANICAL SPECS	
MECHANICAL SPECS	Black
	Black PC
Color	
Color Lens	PC

PACKAGE

Dimension(mm)	N.W.(KG)	G.W.(KG)	Package Size(mm)	Shippment Quantity
259.99*161.12	2.0	2.50	315*315*165	2240pcs/20'GP
298.54*161.12	2.6	3.15	365*365*165	1715pcs/20'GP

UFO LED HIGH BAY LIGHT ZI









Description

LED UFO The special design of the aluminium heat sink enhances the efficiency of hot and cold air exchange. Its service life is equivalent to that of the chip, which effectively reduces the temperature of the light source and ensures the stability of the light source and the extension of the life lighting fixture made with high luminous effect in addition to high wattage with die casted aluminium.

Application

Suitable for urban and rural road, garden road, industrial park road

Features

IP65

IK10

90° (Optical 45°, 60°, 120°)

Optional DALI 2.0

Op..onal 0~10V Dimming

Hook and Yoke Installation

Plug and Play Zahaga Sensor

Plug and Play Emergency Kit

Zhaga Interface

PC and AL Reflector





Outdoor Lighting

Insulation Grade



DATA SHEET

▶ OPTICAL SPECS	
Lumen Efficacy	140Lm/W (Max 210Lm/W)
CCT	6500K (Optional 2700K~6500K)
CRI	>80
▶ ELECTRICAL SPECS	
Power	150 Watts (Optional 100~200 Watts)
Input Voltage	220~240 Vac
Power Frequency	50/60 Hz
Power Factor	>0.95
Total Harmonic Distortion	<10% (@230V)

▶ OTHER DETAILS	
Lifespan	≥50,000 Hours
Operating Temperature	-30°C~50°C
LED Driver Spec	SOSEN
LED Spec	SMD 2835
Optional Dimming	DALI,0-10V,PWM,Smart control management system

Class I

▶ MECHANICAL SPECS	
Color	Black
Lens	PC
Ingress Protection	IP65
Impact Resistance	IK10
Material	Housing:ADC12 Die-cast Aluminium Cover:Polycarbonate

PACKAGE

Dimension(mm)	N.W.(KG)	G.W.(KG)	Package Size(mm)	Shippment Quantity
259.99*161.12	2.0	2.50	315*315*165	2240pcs/20'GP
298.54*161.12	2.6	3.15	365*365*165	1715pcs/20'GP

UFO LED HIGH BAY LIGHT 240W



Description

LED UFO The special design of the aluminium heat sink enhances the efficiency of hot and cold air exchange. Its service life is equivalent to that of the chip, which effectively reduces the temperature of the light source and ensures the stability of the light source and the extension of the life lighting fixture made with high luminous effect in addition to high wattage with die casted aluminium.

Application

Suitable for urban and rural road, garden road, industrial park road

Features

IP65

IK10


90° (Optical 60° &120°)

Optional DALI 2.0

Optional 0~10V Dimming

Max 500 Walls

Hook and Yoke Installation

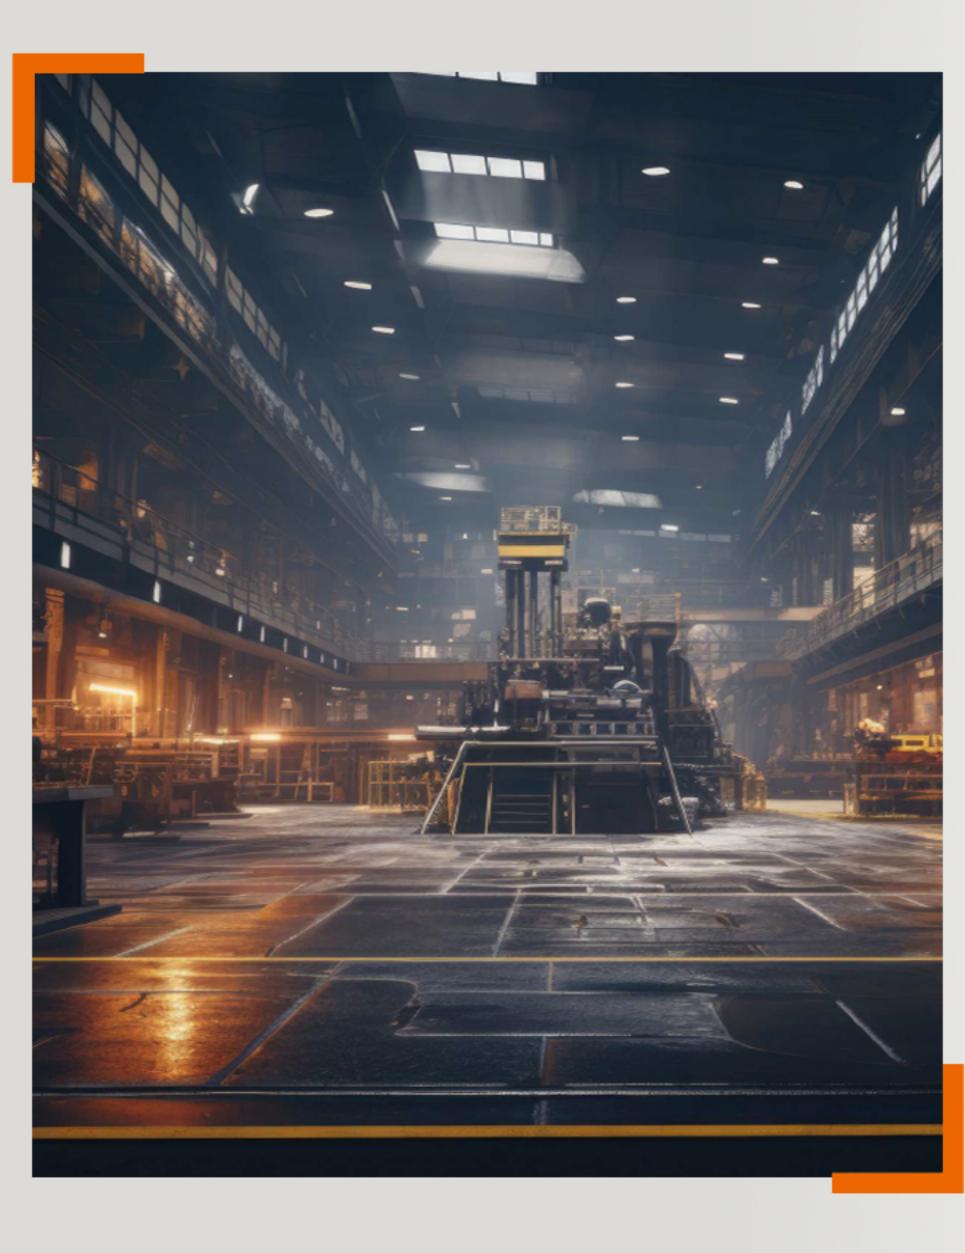

Outdoor Lighting



DATA SHEET

▶ OPTICAL SPECS	
Lumen Efficacy	140 Lm/W (Optional Max 210 Lm/W)
CCT	6500K (Optional 2700K~6500K)
CRI	>80

▶ ELECTRICAL SPECS	
Power	240 Watts (Optional 100~500 Watts)
Input Voltage	220~240 Vac
Power Frequency	50/60 Hz
Power Factor	>0.95
Total Harmonic Distortion	<10% (@230V)
Insulation Grade	Class I

▶ OTHER DETAILS			
Lifespan	≥50,000 Hours		
Operating Temperature	-30°C~50°C		
LED Driver Spec	SOSEN		
LED Spec	SMD 2835		
Optional Dimming	DALI,0-10V,PWM,Smart control management system		

► MECHANICAL SPECS	
Color	Black
Lens	PC
Ingress Protection	IP65
Impact Resistance	IK10
Material	Housing:ADC12 Die-cast Aluminium Cover:Polycarbonate

PACKAGE

POWER	PACKAGE SIZE	N.W.(KG)	G.W.(KG)
100W	L290*W290*H140 (mm)	1.2	1.6
150W	L310*W310*H140 (mm)	1.4	1.8
200W	L330*W330*H140 (mm)	1.6	2.0
240W	L380*W380*H140 (mm)	2.0	2.5
300W	L420*W420*H170 (mm)	3.0	3.6
400~500W	L540*W540*H210 (mm)	9.6	10.4